


The **3-Stage Decontamination Unit** resolves the contamination issues of your employees with a self contained modular system consisting of three cells separated by plastic strip curtains.

3STAGE DECONTAMINATION ATTGUARD KEEPING IT HEALTHY

SPECIFICATIONS

- The light but robust cubicles are fabricated from aluminium sheeting with a fully welded assembly and are finished with durable white powder coating and fitted with a Perspex skylight.
- The cubicles are easily demountable and fit through standard doorways which makes relocation to restricted areas possible.
- The hot and cold water feed hoses have colour coded quick release fittings and arranged that doesn't allow a possible crossover of the hot and cold system. The hoses are detachable from the hot water tank and shower ends.
- Both shower cubicles are fitted with a shower rose which can be either wall hung or hand held. The on/off taps for both hot and cold water are commercial grade ball valves.
- The 125 litre electric hot water system with a 2400 watt electric heater and a pressure reducing valve on the tank inlet is mounted onto its own trolley.
- Waste water is collected into a single pump/filter tank assembly. The submersible pump automatically switches on as the water level rises within the tank and pumps the water through an inline 5 micron Cartridge filter, housed in a clear canister for easy inspection.
- Operation transfers affixed to the steel cabinets.

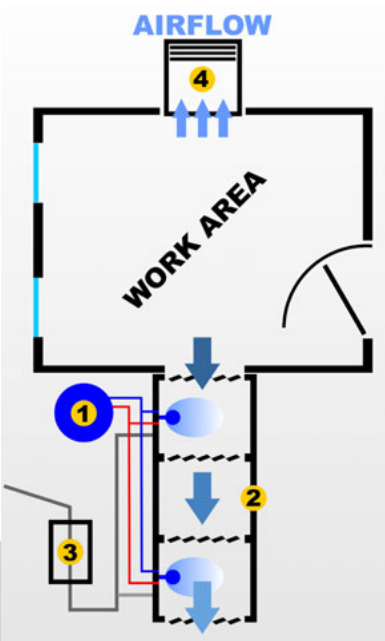

1. Hot water
2. Decontamination units
3. Pump Filter
4. Bowman's Negative Air Unit

CONTACT:

0435 070 537

sales@attguard.com.au

Lismore NSW 2480

www.attguard.com.au