


A versatile, self contained, transportable Decontamination Unit. Ready to go wherever you are...



3 STAGE MOBILE DECONTAMINATION

SPECIFICATIONS

- The Clean Change Room is fabricated from 50mm thick coolroom panels with an aluminium checker plate floor and standard fixings.
- The hot and cold water feed hoses have colour coded quick release fittings and arranged that doesn't allow a possible crossover of the hot and cold system. The hoses are detachable from the hot water tank and shower ends.
- Both shower cubicles are fitted with a shower rose which can be either wall hung or hand held. The on/off taps for both hot and cold water are commercial grade ball valves.
- The 125 litre electric hot water system with a 2400 watt electric heater and a pressure reducing valve on the tank inlet is mounted onto its own trolley.
- Waste water is collected into a single pump/filter tank assembly. The submersible pump automatically switches on as the water level rises within the tank and pumps the water through an inline 5 micron Cartridge filter, housed in a clear canister for easy inspection.
- The Trailer is a single axle unit, with cable operated over ride disc brakes, strong galvanised steel RHS chassis, complete with lights, wiring harness, a seven pin trailer plug, reflectors, fold down tail gate and step assembly.

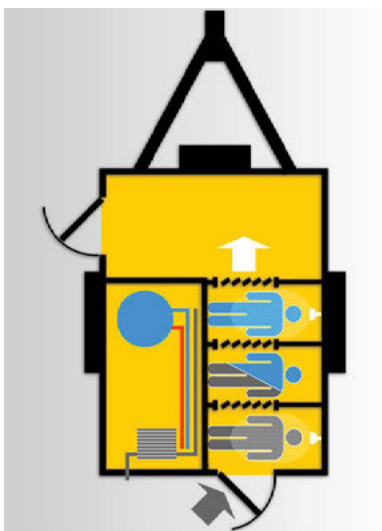

CONTACT:

0435 070 537

sales@attguard.com.au

Lismore NSW 2480

www.attguard.com.au